


03/23/2020




GINNY & STEVE SHELLEY
3 GLEN HIGHLAND COURT
PHOENIX MD 21131

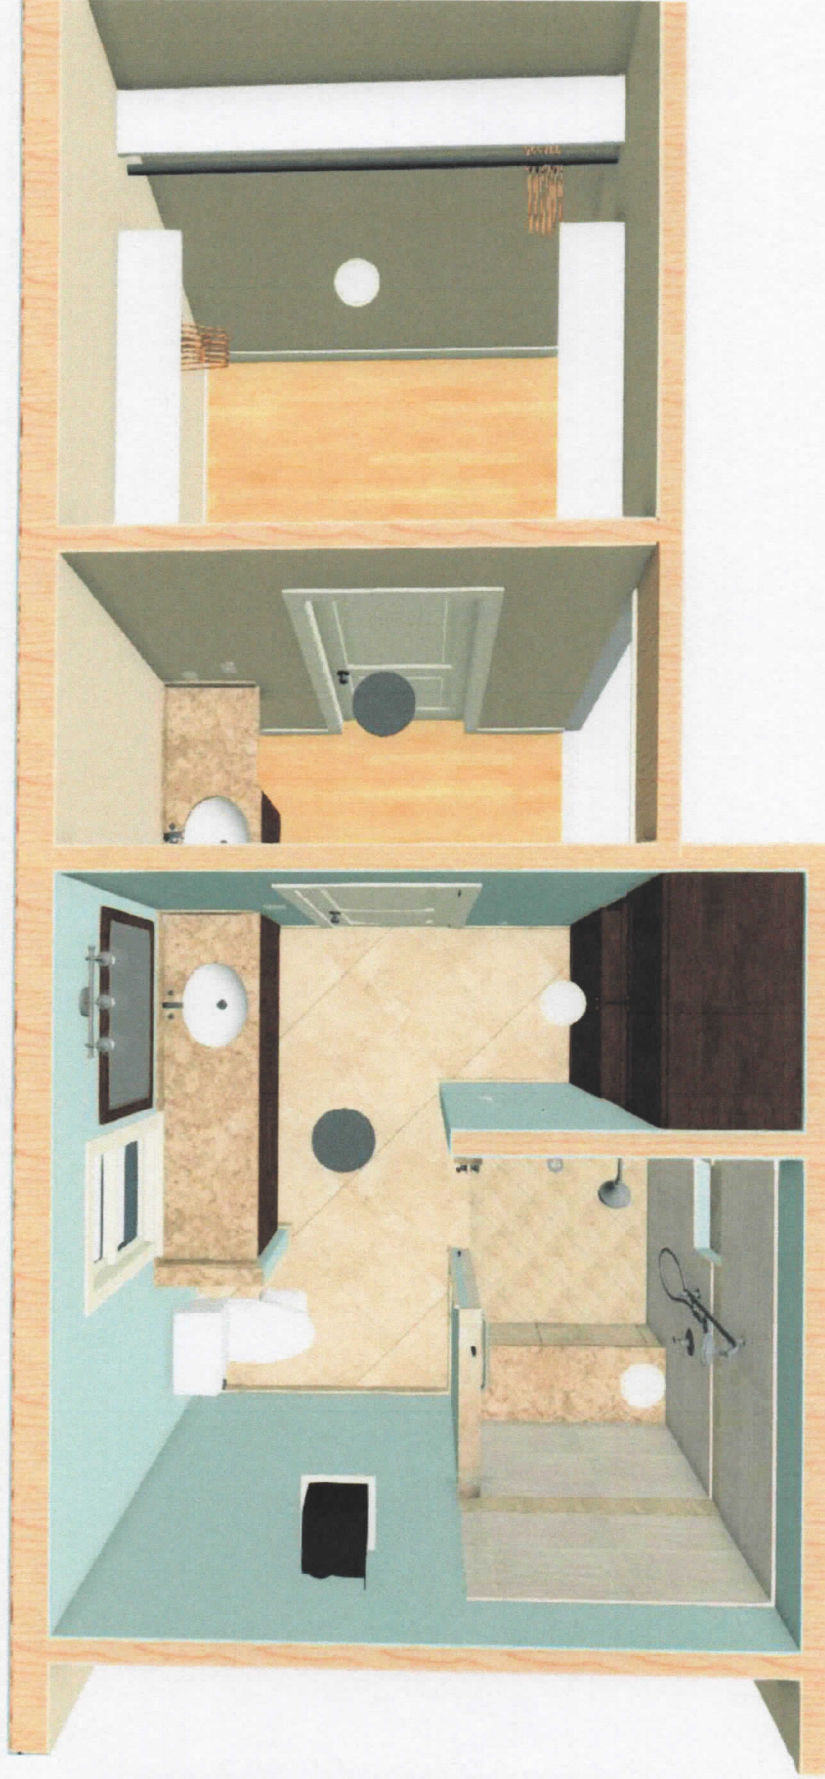

SHELLEY RESIDENCE
HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005

03/23/2020

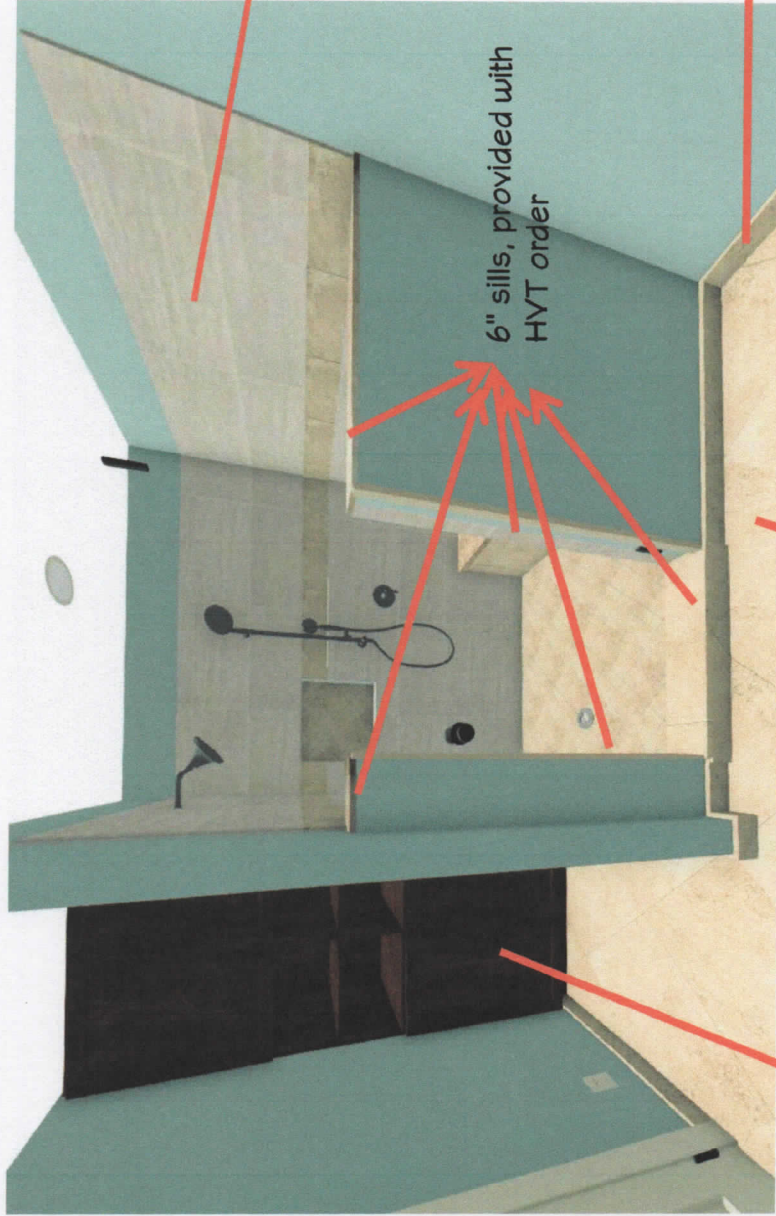

SEE TILE LAYOUT
DETAIL for patterns,
materials

6" sills, provided with
HVT order

Bullnose tile baseboard
around the room

20" x 20" floor tile on
diagonal pattern


SEE ELEVATION "A"
for cabinetry details;
Alcove build to size for
the cabinets.



SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005

03/23/2020

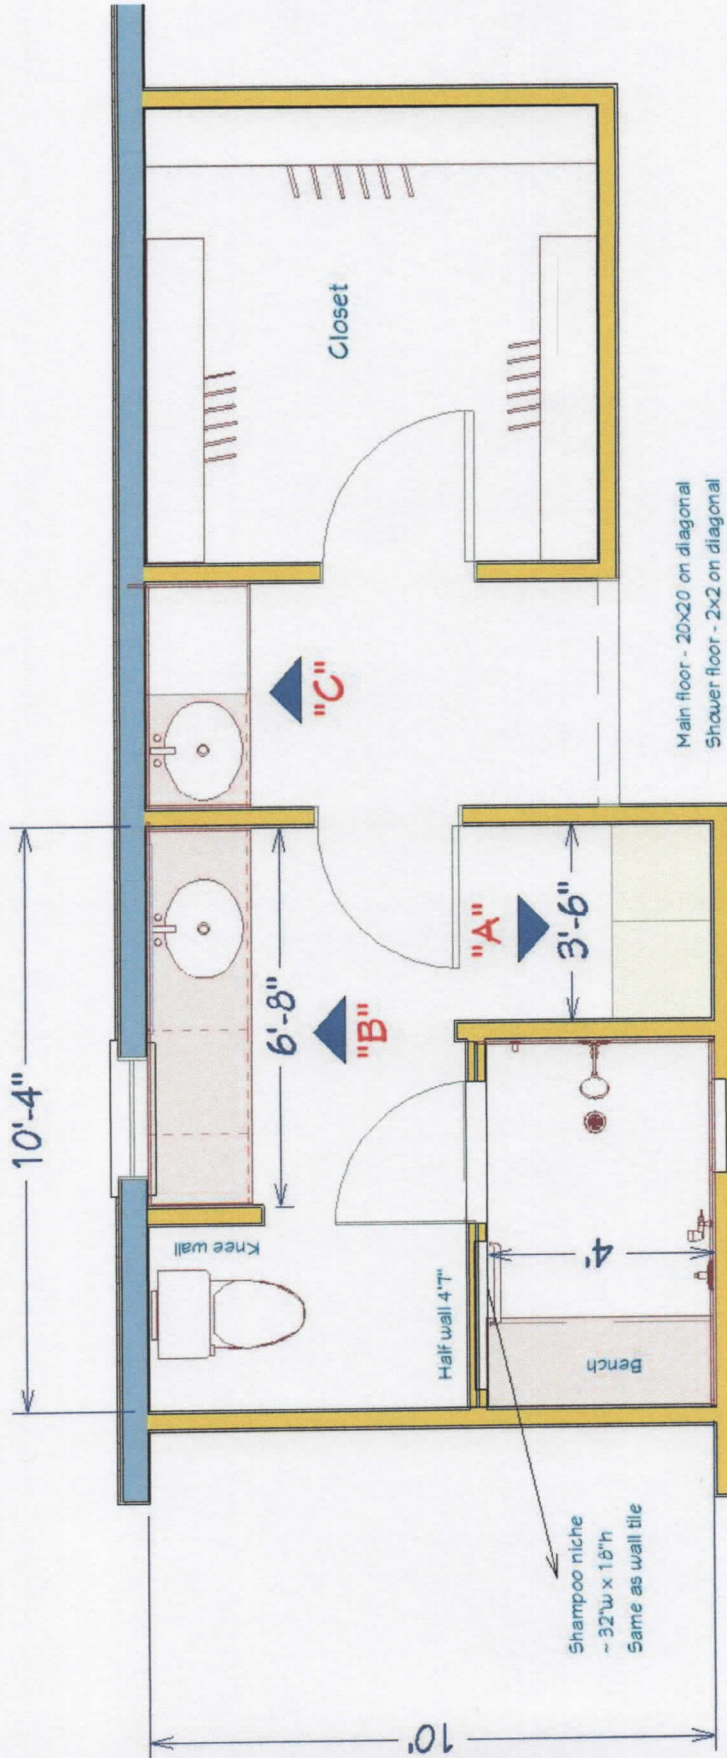


Main floor - 20x20 on diagonal
Shower floor - 2x2 on diagonal
Shower walls - 10x20 with 6x6 deco stripes
Bullnose baseboard & bullnose on edges of tile
Shower drain slightly off-center (TBD)
Showerhead with diverter
Handheld on slidebar with diverter
Two grab bars



SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005

03/23/2020

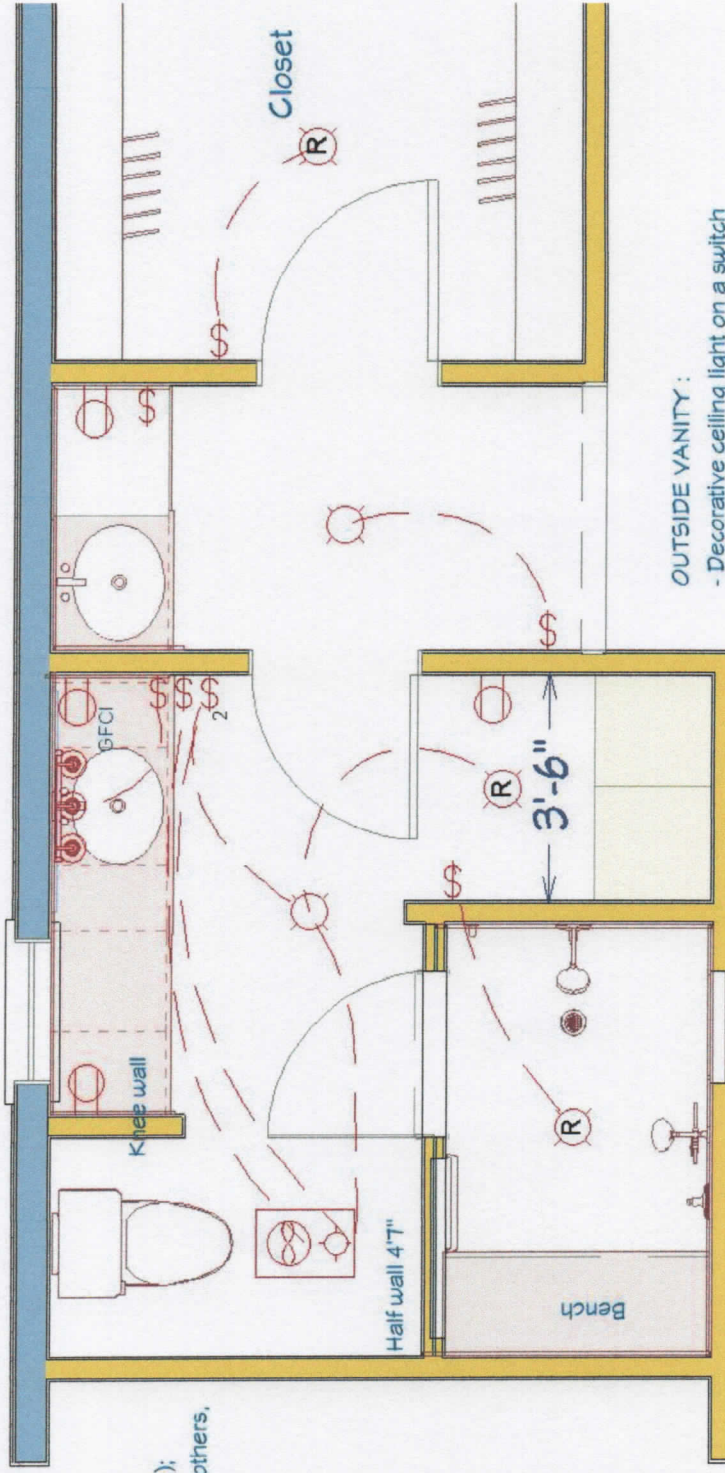

MASTER BATHROOM :

- Bathroom fan w/light and w/nightlight (**PROVIDED**); fan on timer (**PROVIDED**), light on same switch as others, nightlight on a separate switch
- Single pole combination switch **PROVIDED** for:
 - Decorative ceiling light,
 - 6" RL in the linen cabinet alcove
 - light on bath fan
- vanity light on a separate switch
- 6" RL in shower, on separate switch
- GFCI at vanity (existing) + new one
- receptacles elsewhere as needed

OUTSIDE VANITY :

- Decorative ceiling light on a switch
- GFCI at the vanity (existing?)
- Vanity light & location TBD (clients), on a switch

CLOSET:


- 6" recessed light on a switch

SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005




ELEVATION "A"

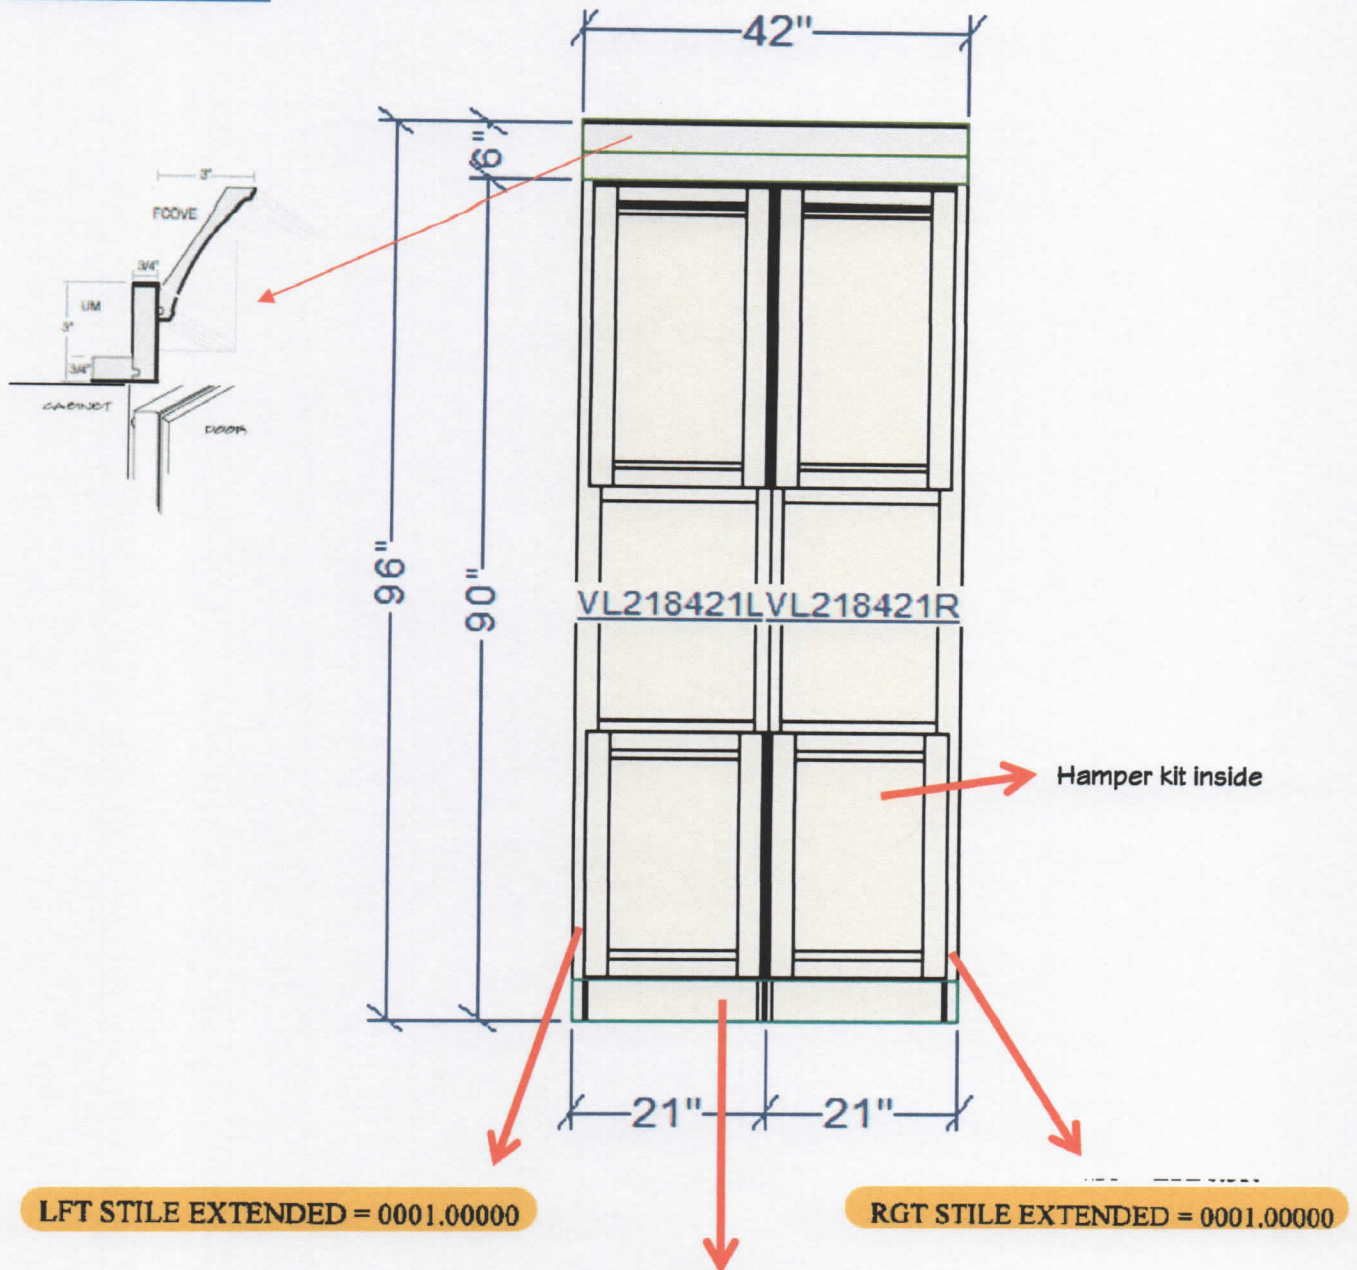

May need to re-
move toekick from
the cabinets, to be
able to carry up the
stairs & rebuild.

SHELLEY RESIDENCE
HAUS 2690 DSGN
GABRIELA MATUCHOYA
443-467-4005

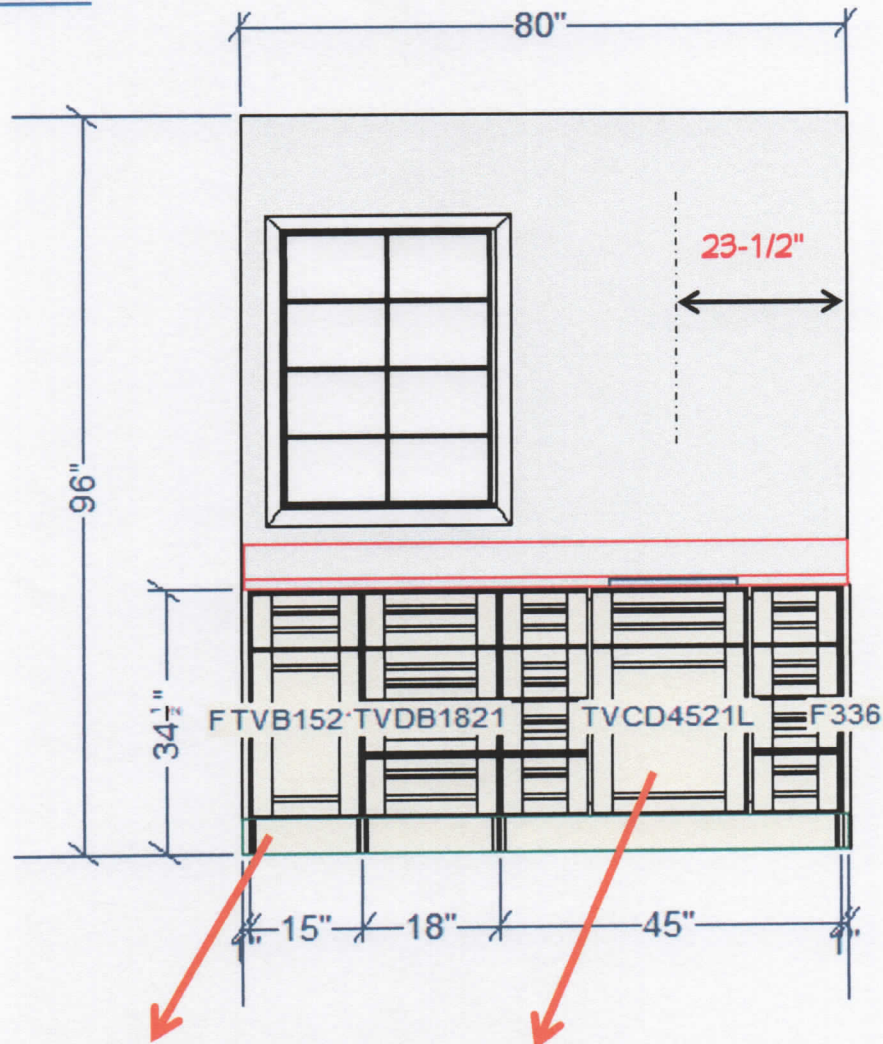

ELEVATION "B"**TVB1521**

\$FPHAMD
\$FIVEPCHDR
\$EXTDSTILE
\$FS

HINGE = HL

5 PIECE HEADER = FPH

EXTENDED STILES = ESB1.5L

LFT STILE EXTENDED = 0001.00000

OVERALL WIDTH WITH EXTD STILES = 0016.00000

TALL VANITY BASE - V0330

APPLIED MOLDING
5 PIECE HEADER
EXTENDED STILE
FULL DEPTH SHELF

TVCD4521

\$FPHAMD
\$FIVEPCHDR
\$EXTDSTILE

HINGE = HR

5 PIECE HEADER = FPH

EXTENDED STILES = ESB1.5R

RGT STILE EXTENDED = 0001.00000

OVERALL WIDTH WITH EXTD STILES = 0046.00000


TALL COMB SINK W/2 DB - V0380

APPLIED MOLDING
5 PIECE HEADER
EXTENDED STILE

SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005

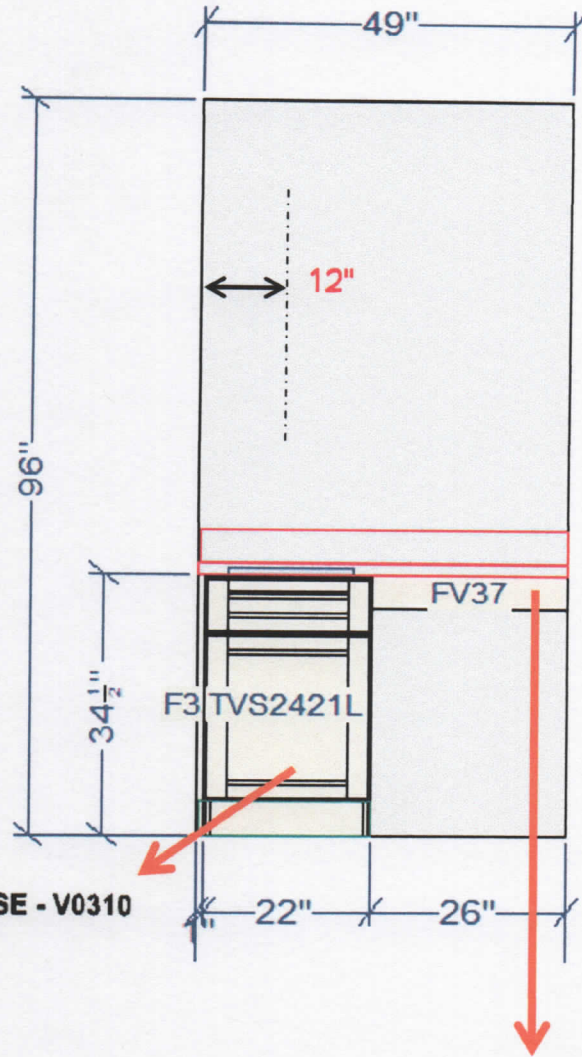

ELEVATION "C"**TVS2421****\$FPAMD****\$FIVEPCHDR****\$FLSHENDBASE****\$EXTDSTILE**

HINGE = HL

5 PIECE HEADER = FPH

EXTENDED STILES = ESB1.5L

LFT STILE EXTENDED = 0001.00000

OVERALL WIDTH WITH EXTD STILES = 0023.00000

FLUSH ENDS = FLSHLR

WIDTH MOD = 0022.00000

TALL VANITY SINK BASE - V0310**APPLIED MOLDING****5 PIECE HEADER****FLUSH END BASE****EXTENDED STILE****FLAT VALANCE - A0630**


Apron/skirt—trim height as needed (3"-4"), use 1x3 ledgers on the side and back walls to support the countertop.

SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOYA
443-467-4005



SHOWERHEAD WALL
elevation

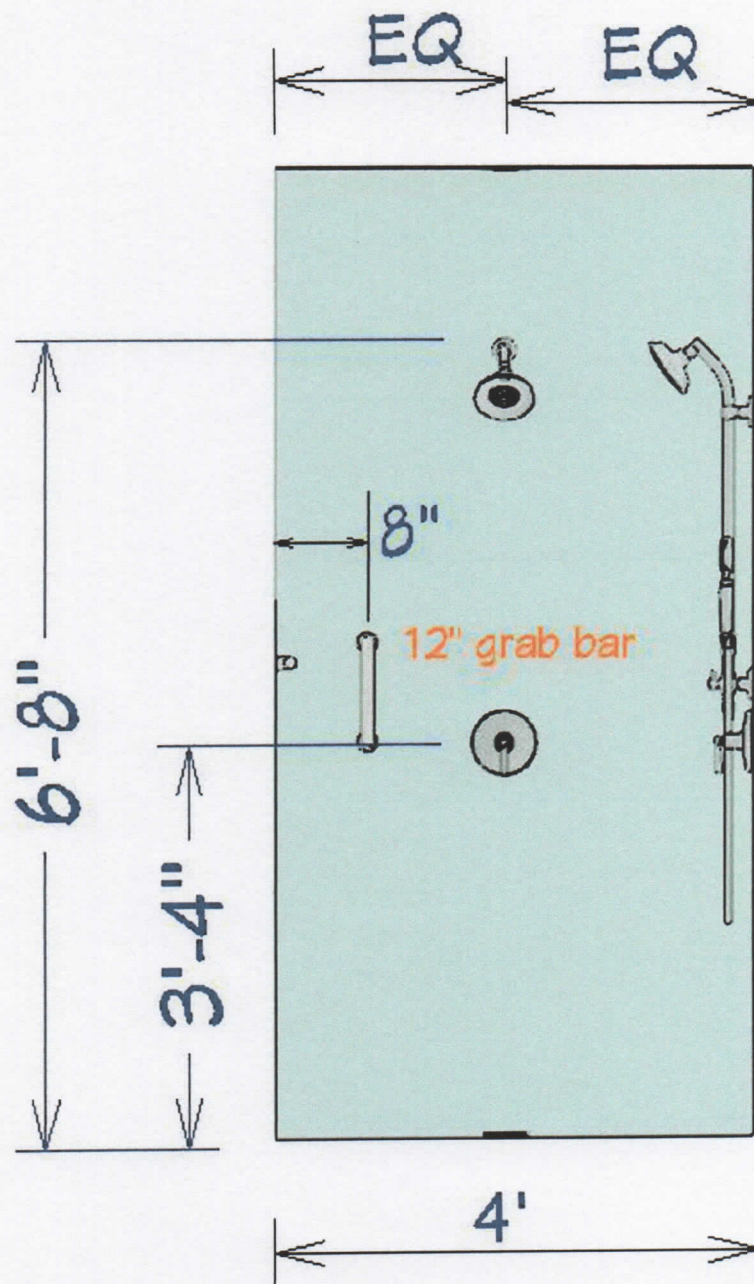


SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOYA
443-467-4005



03/23/2020

BACK SHOWER WALL
elevation

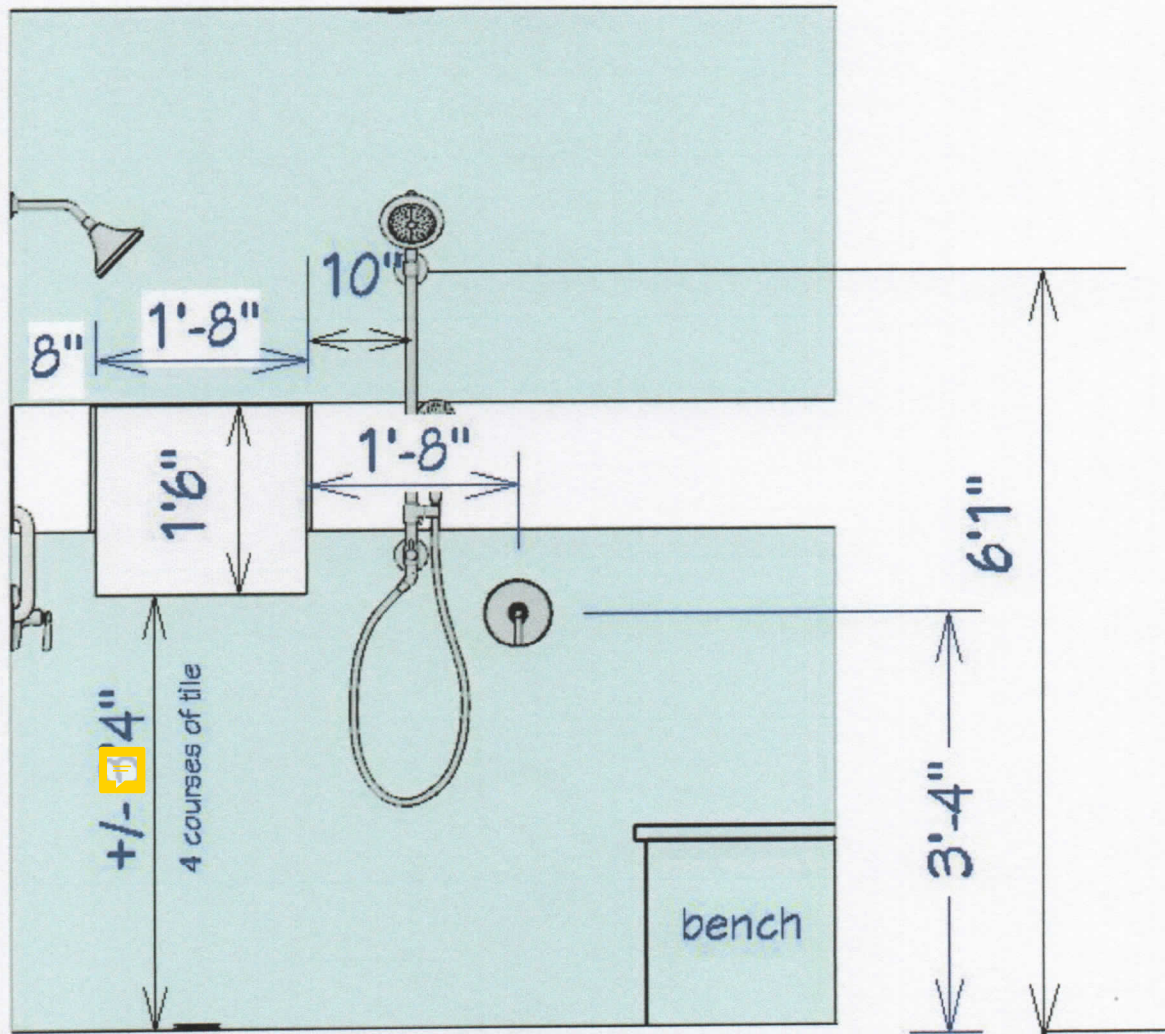


SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005




GLASS WALL
elevation

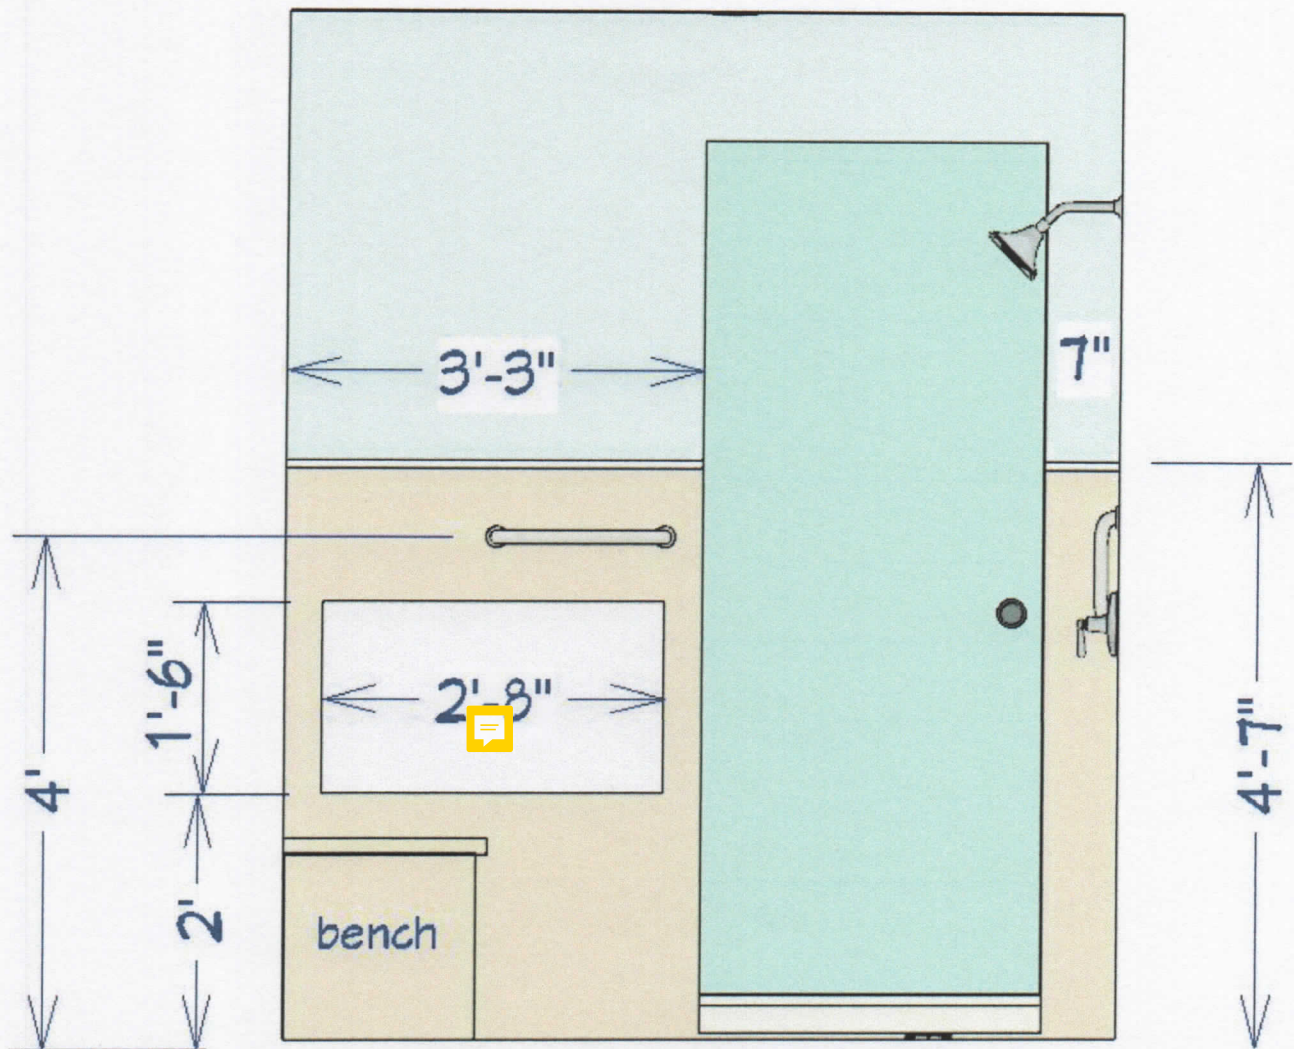

SHELLEY RESIDENCE
HAUS 2690 DSGN
GABRIELA MATUCHOYA
443-467-4005



Master Bath

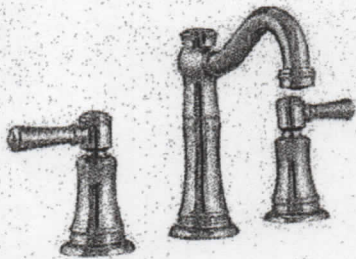


Signature Hardware 8" Widespread Bathroom Sink Faucet


7536516 Polished Chrome
Qty: 2 / \$269.00 ea




Kohler Hand Held Shower
7056458 Polished Chrome
\$464.97 ea

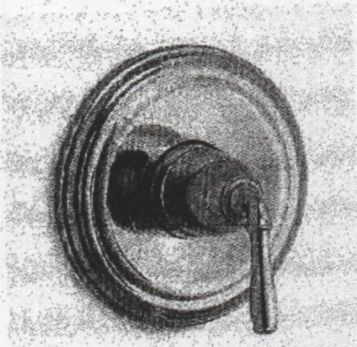

Kohler Non-Thermostatic Valve Trim
7170044 Polished Chrome
Qty: 2 / \$51.53 ea

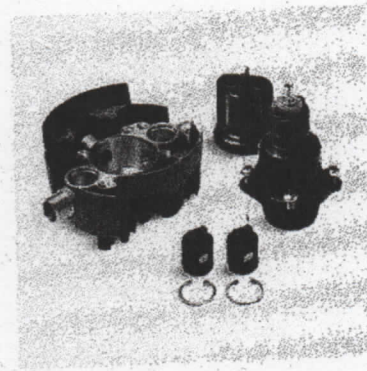


Kohler Tub & Shower Rough In Valve
7180338 Rough Brass
Qty: 2 / \$106.73 ea



Kohler Shower Head
4669172 Polished Chrome
\$73.88 ea



Kohler Shower Arm
4669142 Polished Chrome
\$69.53 ea

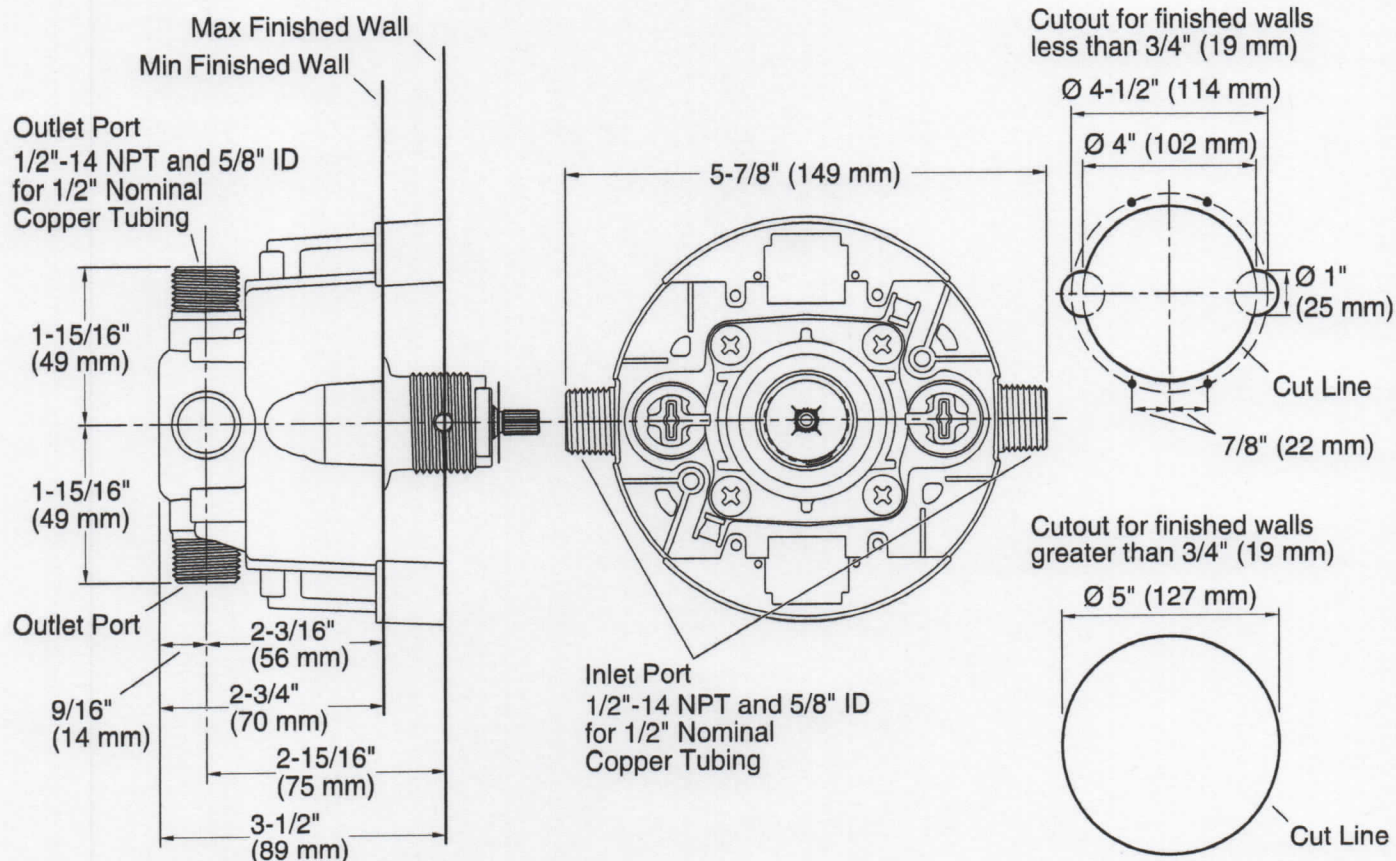

Technical Information

All product dimensions are nominal.

Valve body: Machined Brass

Shower Valve:

Min. pressure IN: 20 psi (1.4 bar)

Notes

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap the shower outlet if deck-mount spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.

For finished walls greater than 3/4" (19 mm) and less than 1-1/2" (38 mm), install support(s) 2" (51 mm) from the stud face.

For finished walls greater than 1-1/2" (38 mm), install support(s) 3" (76 mm) from the face of the finished wall.

Features

- Includes valve body, pressure balance cartridge, rough-in guide and mud guard
- 1/2" Universal NPT & direct sweat inlets & outlets, with stops
- Service stops include integral check valves
- 5.0 gpm (18.9 l/min) maximum flow rate at 45 psi
- Single lever design cycles from off through cold to hot
- Provides temperature regulation and automatic anti-scald protection
- One piece cartridge design simplifies installation and maintenance
- Adjustable high temperature limit stop to control maximum water temperature
- Requires valve trim to complete installation (sold separately).

Material

- Forged De-zincification Resistant Brass body provides long term reliability and resistance to aggressive water conditions

Technology


- Pressure-balancing diaphragm technology maintains outlet temperature within +/- 3 degrees Fahrenheit during water pressure fluctuations

Installation

- Designed for use in standard, back to back and thin wall installations
- Valve body features integral mounting locations and symmetrical valve inlets to simplify installation
- Cartridge is reversible for installations where hot and cold supplies are reversed.
- Rough-in guide designed for both standard and thin wall installations
- Installed valve rough-in can be flushed and pressure tested to 150psi max (air or water) without cartridge, using K-10351 Test Cap

Optional Accessories

K-10350 Deep Rough-In Kit For K-8305 Cartridges
K-10351 Test Cap For K-8300 Series Valve Bodies

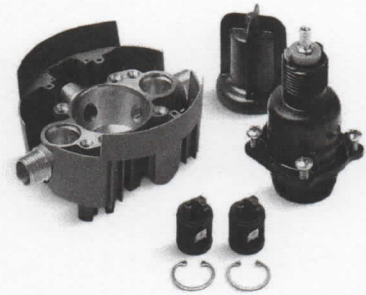


Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Artifacts®
HydroRail-S™ Shower Column Kit
K-76472



Technical Information:
All product dimensions are nominal.

Rated maximum flow: 2 gal/min (7.6 l/min)

Rated maximum flow: 2 gal/min (7.6 l/min)

Install this product according to the installation guide.

IMPORTANT! The sidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the sidebar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

OBC compliant when installed to the specific requirements of these regulations.

KOHLER® Faucets

Artifacts® HydroRail-S™ Shower Column Kit K-76472

Features


- Includes K-72774 Artifacts showerhead, K-72776 Artifacts handshower, K-45906 HydroRail-S shower column, and K-9514 MasterShower® 60-inch metal hose.
- Katalyst® air-induction technology maximizes the air/water mix for a powerful, even flow.
- Optimized sprayface features a new nozzle geometry that delivers a more focused coverage of large water droplets that both minimizes wasteful overspray and increases cleaning and hair-rinsing performance.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- New translucent nozzle color provides improved visual aesthetics with all available finishes.
- 2.0 gpm (gallons per minute) showerhead/handshower flow rate.
- Patent-pending technology allows for an easy shower installation.
- Slidebar bracket allows you to adjust height and angle of handshower.
- Diverter at the base of the column makes for easy toggling between handshower and showerhead.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- In shower only wall mount installation.
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation).
- May require additional service parts based on installation type (see installation guide for details).
- Includes an adapter that will fit with most installations but may require K-1194630, K-1187917, or K-1194302.



OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze

Features


- Includes K-72774 Artifacts showerhead, K-72776 Artifacts handshower, K-45906 HydroRail-S shower column, and K-9514 MasterShower® 60-inch metal hose.
- **Katalyst® air-induction technology maximizes the air/water mix** for a powerful, even flow.
- Optimized sprayface features a new nozzle geometry that delivers a more focused coverage of large water droplets that both minimizes wasteful overspray and increases cleaning and hair-rinsing performance.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- New translucent nozzle color provides improved visual aesthetics with all available finishes.
- 2.0 gpm (gallons per minute) showerhead/handshower flow rate.
- Patent-pending technology allows for an easy shower installation.
- Slidebar bracket allows you to adjust height and angle of handshower.
- Diverter at the base of the column makes for easy toggling between handshower and showerhead.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- In shower only wall mount installation.
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation).
- May require additional service parts based on installation type (see installation guide for details).
- Includes an adapter that will fit with most installations but may require K-1194630, K-1187917, or K-1194302.

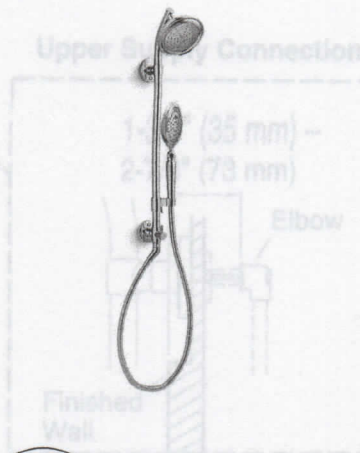

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze

ESTATE® UNDERCOUNTER SINK

0484.000

- Classic oval undermount sink
- Made from vitreous china
- Unglazed rim for undercounter mount
- Front overflow
- Oval 17" x 14" Bowl
- Center drain
- Supplied with undercounter mounting kit and template
- Shown with Quentin Widespread Faucet 7440.801 (Not included)
- Coordinates with Estate® Suite of fixtures
- Available Exclusively at Ferguson® Showrooms



Nominal Dimensions:


19-1/8" x 16-1/8" (486 x 410mm)

Bowl Size:

17" (432 mm) wide,
14" (356 mm) front to back,
5-1/2" (140 mm) deep

**Compliance Certifications -
Meets or Exceeds the
Following Specifications:**

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

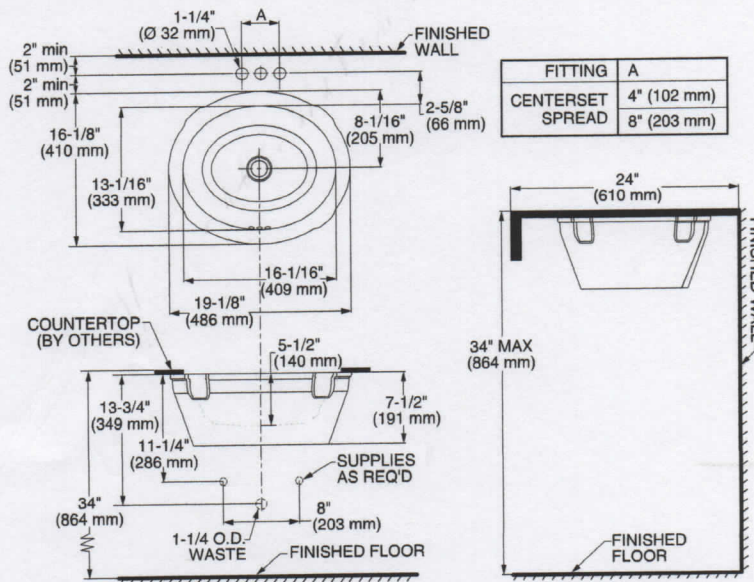

To Be Specified

- ☐ Color: ☐ White: ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:



* See faucet section for additional models available

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK. FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2 / CSA B45.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

03/01/2020

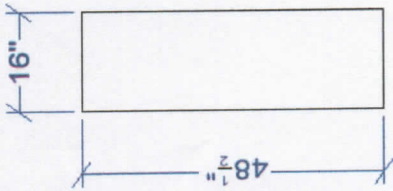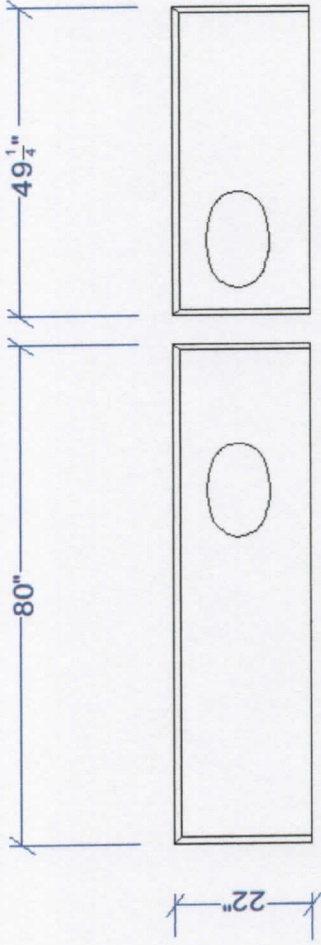

VANITY TOPS AND SHOWER BENCH SEAT

CAMBRIA Berkely, eased edges

Client will provide sinks - to be undermounted
4" backsplash on both vanities, all three sides



SHELLEY RESIDENCE

HAUS 2690 DSGN
GABRIELA MATUCHOVA
443-467-4005

Hunt Valley Tile & Stone, LLC.

11110 Pepper Rd
Suite D
Hunt Valley MD 21031

Bill To
2690 Design Gabby Matuchova PO Box 42162 Baltimore, MD. 21284

Ship To
Ginny Shelly 3 Glen Highland Ct Phoenix MD

		S.O. No.	P.O. No.	Terms	Due Date
		73225		Net 30	4/3/2020

Item	Description	Ordered	Invoiced	U/M
V68	2x2 ETHNOS HURON NATURAL---r--2/12/20	30	30	SQFT
V68	6X6 ETHNOS HURON NATURAL---r--2/12/20	22	22	SQFT
V68	20X20 ETHNOS HURON NATURAL---r--2/12/20	107.6	107.6	SQFT
V68	10X20 ETHNOS HURON NATURAL---r--2/12/20	96.8	96.8	SQFT
V68	3X20 ETHNOS HURON NATURAL BULLNOSE---r--2/12/20	41	41	PCS
112436DUR	4X36 DURANGO SILL	1	1	EACH
112672DUR	6X72 DURANGO CURB SILL	4	4	EACH
FREIGHT	FREIGHT CHARGES	1	1	
DELIVERYO...	OUTBOUND DELIVERY FEE	1	1	
	PAID IN FULL			

				Subtotal
--	--	--	--	-----------------

ALL RETURNS SUBJECT TO APPROVAL, NO RETURNS AFTER 30 DAYS

Sales Tax

Total

Payments

Balance I

Phone #	Fax #
410-771-6441	410-771-6443